





Raven Side Display Numeric

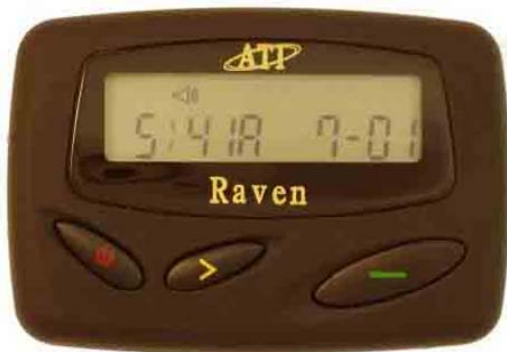

- Available POCSAG or FLEX
- 18 Messages, 20 Characters per Message
- 4 Paging Addresses
- Time & Date Stamp
- Sequential Lockout
- 12 Message Protection
- 15 Musical Alerts & 4 Tone Alerts
- Alarm Clock Settings
- Available in 5 Colors
- 12.5 KHz or 25 KHz Spacing
- Synthesized & Hand Programmable (POCSAG)

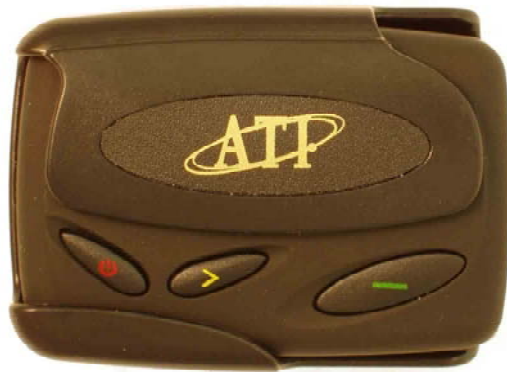

Raven FLEX Specifications

Raven FLEX Specifications	VHF	900 MHz
Frequency Range	138-174 MHz	929-932 MHz
Baud Rate (bps)	1600bps/3200bps/6400bps/Phase Any	1600bps/3200bps/6400bps/Phase Any
Code Format	FLEX	FLEX
Paging Sensitivity (u/Vm)	Baud 1600 : 6 u/Vm Baud 3200 : 8 u/Vm Baud 6400 : 9 u/Vm	Baud 1600 : 6 u/Vm Baud 3200 : 8 u/Vm Baud 6400 : 9 u/Vm
Selectivity	+/- 50 dB	+/- 55 dB
Spurious & Image Rejection	+/- 40 dB	+/- 40 dB
Frequency Stability	+/-15 ppm	+/-5 ppm
Channel Spacing	25/12.5 kHz (Narrow Band)	25/12.5 kHz (Narrow Band)
Receiver Type	Synthesized	Synthesized
Address Capability	4 FLEX address	4 FLEX address
Frequency Deviation	+/-4.8kHz	+/-4.8kHz
Alert Tone SPL	-78 dB@12 in	-78 dB@12 in
Operating Temperature	5 ⁰ to 40 ⁰ C	5 ⁰ to 40 ⁰ C
Storage Temperature	-40 ⁰ to +85 ⁰ C	-40 ⁰ to +85 ⁰ C
Power Supply	1.5V, AAA Alkaline Battery	1.5V, AAA Alkaline Battery
Battery Life	Phase Any = Estimated 30 days	Phase Any = Estimated 30 days
Low Battery Alert level	1.20 Volts	1.20 Volts
Dimensions	3.6in x 2.9in x 0.11in	3.6in x 2.9in x 0.11in

